



PRODUCT DATA SHEET

SST-220-PL-IND

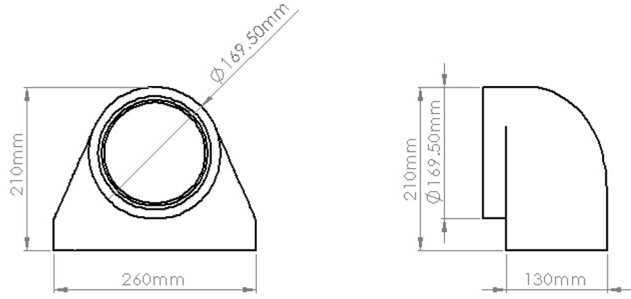

Rapid Self-Seal Thermal 220x90mm to 125mmØ Plenum

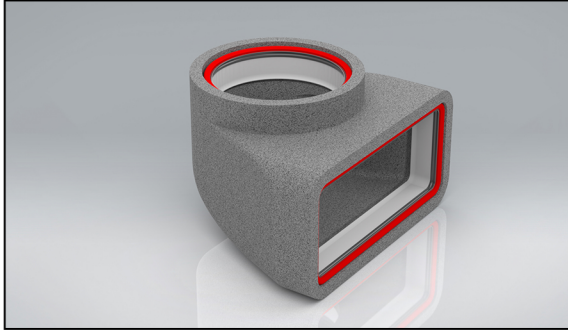

MANUFACTURER:	VERPLAS LTD
PART NUMBER:	SST-220-PL-IND
SIZE:	220x90mm
FOR USE WITH:	VERPLAS THERMAL 220 & 125mmØ
BOX QUANTITY:	6
INDIVIDUAL WEIGHT:	190g
COLOUR	Grey
MIN OPERATING TEMP	-15°C
MAX OPERATING TEMP	+60°C
THERMAL RESISTANCE	0.666 m ² K/W
THERMAL CONDUCTIVITY	0.03 W/mK

SPECIFICATION DETAILS

The Verplas Self-Seal Thermal SST-220-PL-IND insulated fitting is manufactured from graphite impregnated expanded polystyrene (EPS) with a minimum density of 25kg/m³ and provides a free area of 19,752 mm². The SST-220-PL-IND is supplied with self-seal female couplings that allow the ducting fitted with a Duct to Fitting Connector to be plugged into the fitting apertures with a push, click and lock mechanism.

The Self-Seal female couplings are manufactured from prime High Impact Polystyrene and a Thermoplastic Elastomer Dynamic Sealing Gasket.

The EPS material is fully tested to meet the thermal conductivity requirements of BASF-EN13163 to assist with the prevention of condensation and is flame retardant to DIN 4102-B1.


The patented push, click and lock mechanism provides a low leakage solution which exceeds the requirements set out in DW/143 Class A leakage test and DW/154 ductwork standards.

The Self-Seal Thermal is compliant with the requirements outlined in the Energy performance characteristics database for use in SAP with MVHR and MEV supply and extract ventilation systems.

AIRFLOW	RESISTANCE	
	125mm	220x90mm
8 l/s	0.40 pa	0.70 pa
13 l/s	0.90 pa	1.80 pa
21 l/s	1.90 pa	4.40 pa
30 l/s	3.57 pa	8.40 pa
60 l/s	10.10 pa	30.80 pa



PERFORMANCE CURVE

220x90mm - 125mmØ

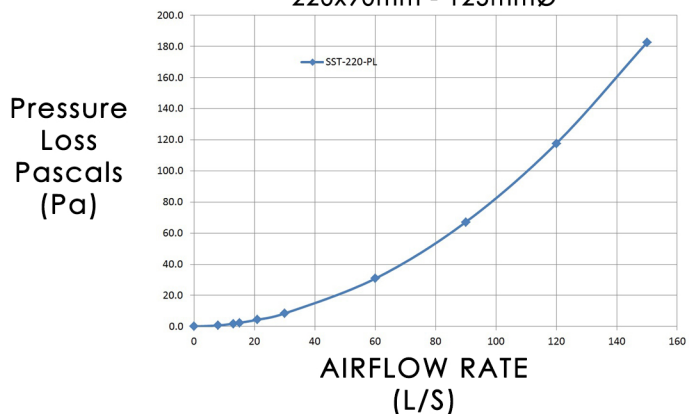

Associated Ancillaries

- SST-220-2M-IND: 220x90mm Rapid Self-Seal Thermal 2m Flat Channel
- SST-220-45VB-IND: 220x90mm Rapid Thermal Self-Seal 45° Vertical Bend
- SST-220-90HB-IND: 220x90mm Rapid Self-Seal 90° Horizontal Thermal Bend



Scan Here
to find out
how quick
it is to install

