

Silhouette 100/SELV

Features & Benefits

- 17mm stylish ultra low profile grille
- Downstream airflow guide vanes for improved pressure development
- Designed for vertical or horizontal application
- Indication light (except B model)
- Fan IPX4 rated - IPX7 rated (SELV)
- Suitable for wall, ceiling, panel and window mounting
- Meets current Building Regulations Approved Document F
- SELV transformer to BSEN 60742



Slimline Bathroom Ventilation

With a slim profile of only 17mm, Silhouette blends in with the wall surface to provide an unobtrusive installation. Silhouette has a FID performance of 21 l/s. Silhouette can be ceiling/panel mounted and connected to an appropriate duct run to the outside.



Safety Extra Low Voltage (SELV) Fans

Safety Extra Low Voltage (SELV) is designed for areas where a fan has to be fitted within zone 1 in a room containing a fixed bath or shower according to IEE wiring regulations. The Silhouette SELV model can be safely installed within the spray area. SELV models are rated IPX7, control is by a mains safety isolating transformer with 12V DC SELV output, which is sited away from any source of spray and out of reach of a person using a fixed bath or shower.

Models

Silhouette 100B/SELV B

Single speed 100mm bathroom/toilet fan with back draught shutter. Indication light on SELV model only.

Model	Stock Ref
B	454055
SVB (SELV)	439974

Silhouette 100T/SELV T (Timer)

Single speed 100mm bathroom/toilet fan with integral adjustable electronic overrun timer (5-30 minutes), indication light and back draught shutter.

Model	Stock Ref
T	454056
ST (SELV)	439975

Silhouette 100HT (Humidity/Timer)

Single speed 100mm bathroom/toilet fan with integral adjustable auto humidity sensor from 60-90% RH, fixed 15 minute overrun timer option via jump switch, indication light and back draught shutter.

Model	Stock Ref
HT	454057

Silhouette 100 SELV SVH (Humidity)

Single speed 100mm bathroom/toilet fan with integral adjustable auto humidity sensor from 60-90% RH, indication light and back draught shutter.

Model	Stock Ref
SVH (SELV)	439976

Silhouette 100TM (PIR/Timer)

Single speed 100mm bathroom/toilet fan. Integral PIR operated model, (presence detector) with adjustable electronic overrun timer (5-30 minutes) indication light and back draught shutter.


Model	Stock Ref
TM	454058

Accessories


Model	Stock Ref
Wall Kit White	254102
Wall Kit Brown	254100
Window kit	442947

Dimensions (mm)

Panel

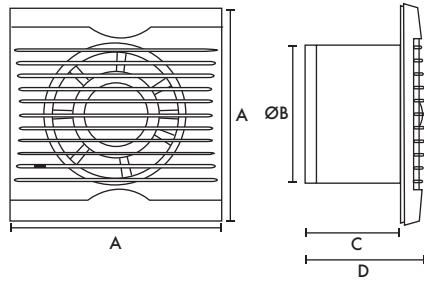

Wall Kit

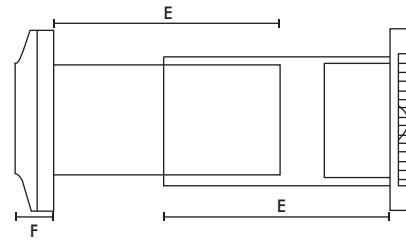

A	BØ	C	D	E	F
160	99	80	97	200	32

Transformer (W X H X D) 147 X 86 X 65

Weight 0.6kg

Fixing hole diameter 105mmØ (Panel & Window), 117mmØ (Wall)

Performance Guide

Model	Extract Performance - FID			Sound dB(A)
	m ³ /h	l/s	Watts	@ 3m
Silhouette 100B/T/H/TM	75	21	14	30
Silhouette 100SVB/SVT/SVH	75	21	15	30



BPC Ventilation Ltd
8 Redlands Road
Larne
BT40 1AX

T: 028 2827 5150

E: info@bpcventilation.com

W: www.bpcventilation.com